


2A-CD AIR-COOLED CONDENSING UNITS

- Outdoor units for use in commercial and residential applications
- Energy efficient dual speed condenser fan
- Dual venturi providing optimum airflow and minimal noise transmission

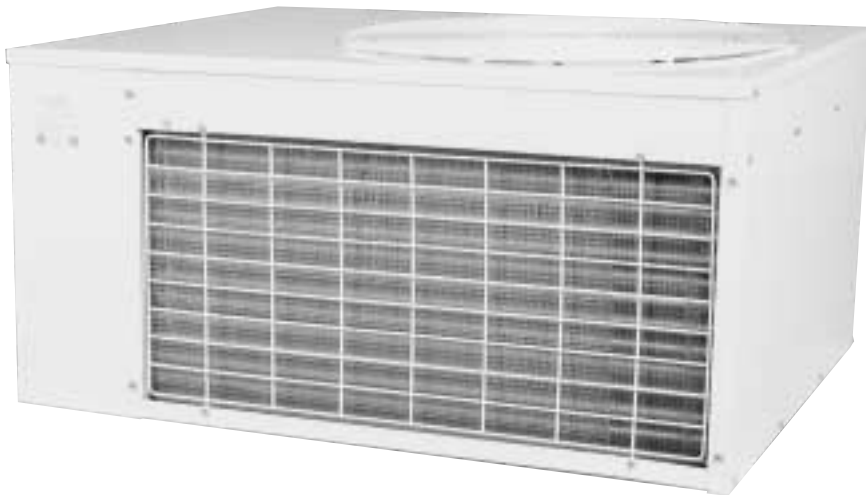

QUALITY FEATURES

- High Energy Efficiency Ratios (EER)
- Satin-coated steel casing with powder paint finish
- Compressor compartment thermally and acoustically insulated
- Low ambient switch prevents compressor operation at low ambient temperatures
- Dual coil design
- Sweat-type coil connections
- Separate electrical compartment
- Service valves
- Voltages available:
208-230/1/60
208-230/3/60 (models 042 to 060)

OPERATING RANGE

- Entering Air
70°F thru 100°F

OPTIONS AVAILABLE

- Copper or HyPoxy[®] coated fin coils

Model	Nominal Capacity		Unit amps (60 Hz)		Connections (in.) O.D.		System ¹ Refrigerant Charge (oz)	Dimensions (in.)			Net Weight lb
	Btu/h	EER	208-230/1	208-230/3	Liquid	Suction		W	H	D	
2A-CD											
020	19,700	11.4	10.8		3/8	1/2	52	28 1/4	18	36 1/8	200
024	24,300	10.8	13.6		3/8	5/8	52	28 1/4	18	36 1/8	210
030	30,900	10.7	16.5		1/2	5/8	74	28 1/4	18	36 1/8	215
036	35,300	10.0	18.8		1/2	5/8	92	28 1/4	18	36 1/8	235
042	42,200	10.1	24.8		5/8	7/8	102	28 1/4	24	36 1/8	275
048	47,800	9.6	28.8	19.1	5/8	7/8	120	28 1/4	24	36 1/8	290
060	60,700	9.6	36.6	23.7	5/8	7/8	146	28 1/4	28	36 1/8	330

1. Add 0.66 oz per foot of liquid line (models 020 to 036)
Add 1.2 oz per foot of liquid line (models 042 to 060)